


ANCHOR BOLT AT EACH CABLE.  
SEE SHEET NOTE 9

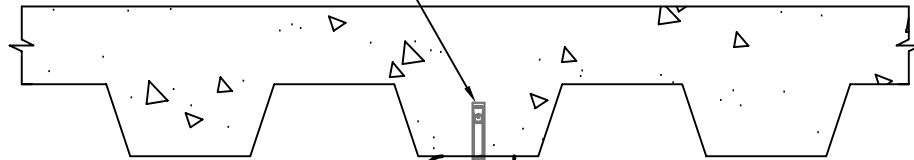

CABLE CLAMP, 2 PLACES EACH CONNECTION

GALVANIZED WIRE THIMBLE

1.5" WIDE X 3" LONG X 12 GAGE MIN. GALVANIZED STEEL STRAP.  
BEND STRAP TO ANGLE OF WIRE BRACE. PROVIDE  $1\frac{3}{32}$ " DIA. HOLES  
FOR ANCHOR BOLT AND WIRE. B-LINE B335-1 TWO HOLE  
ADJUSTABLE HINGE MAY BE USED IN PLACE OF BENT STEEL STRAP.

*SAMPLE*  
*NOT FOR CONSTRUCTION*

	<b>MEC</b>	SCALE 1 1/2"=1'	PROJECT NO. 00-036
	<b>MAHALAT ENGINEERING CORPORATION</b>	DRAWN DTM	DATE 01/29/02
	432 TENNESSEE STREET, VALLEJO, CALIFORNIA 94590-4453 FAX: (707) 649-4351 TEL: (707) 648-2255	CHECKED	DATE
	CONTRACTOR <b>MONGER MOUNTS, INC.</b>	FILE NAME	
TITLE PROJECTOR MOUNTED TO CONCRETE SOFFIT UPPER CABLE BRACE ATTACHMENT	SHEET 4 MM-1		